

Programable Power Amplifier Module



X64USB

2 Channels

Channel A **600W** rms / 4 Ohm

Channel B **400W** rms / 4 Ohm

X16USB



2 Channels

Channel A **1000W** rms / 4 Ohm

Channel B **600W** rms / 4 Ohm

X1000USB

1000W rms / 4 Ohm

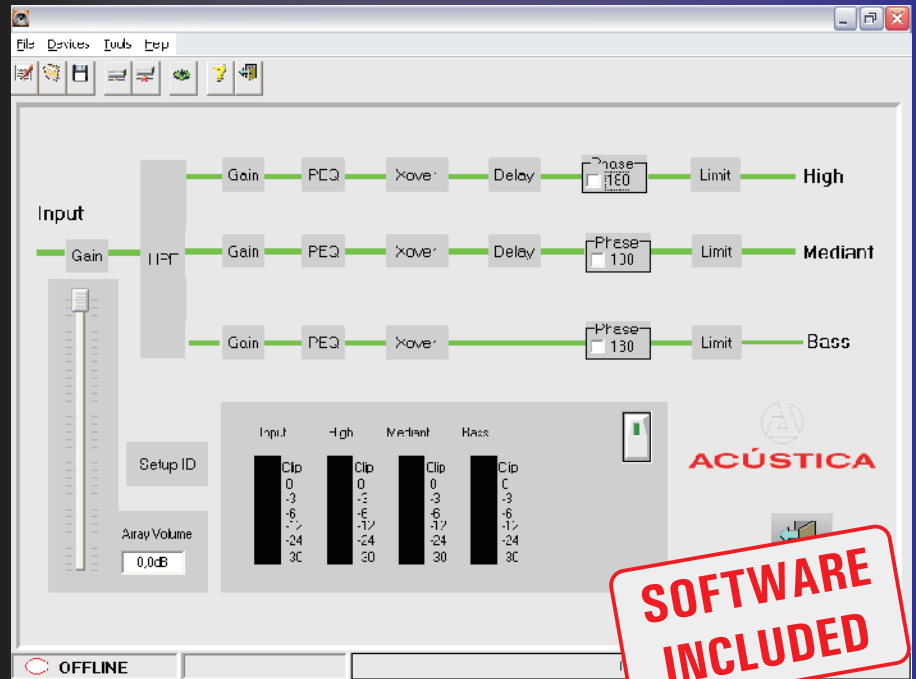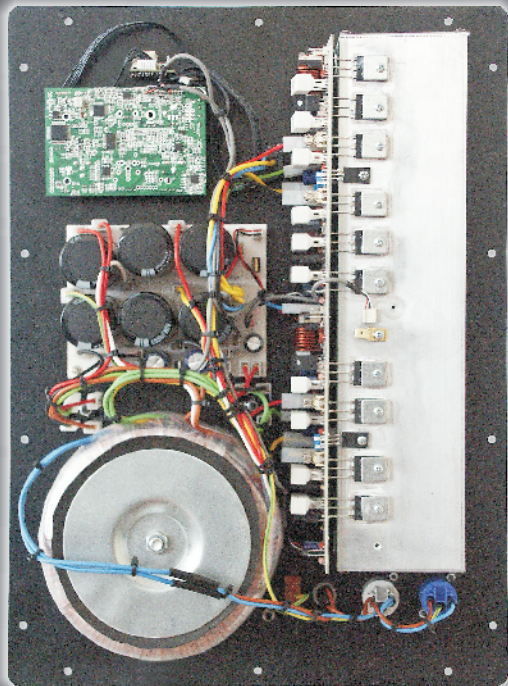

	X64 usb	X16 usb	X1000 usb
Frequency Response +/- 3dB	20 Hz - 20 kHz		
Power output, channel A	600W rms @ 40hm	1000W rms @ 40hm	1000W rms @ 40hm
Power output, channel B	400W rms @ 40hm	600W rms @ 40hm	
Active protection circuits	All protections, limiter		
Connectors	Input COMBI, Link XLR, Output Speakon® NL4		
PC connector	Ethernet RJ45		
Cut-out (WxHxD)	303 x 420 x 100mm	328 x 420 x 100mm	
Mains Inlet	In/Link Neutrik® PowerCon®		
Dimensions (WxHxD)	333 x 450 x 80mm	333 x 450 x 80mm	358 x 450 x 80mm
Weight	8Kg	10Kg	9Kg